

SBE/SIR 92 Specifications

Stainless steel



Walsted Truck A/S

Flexible solutions

Type			SBE/SIR 92
Max lifting load	Total load on forks + Basis lift	kg	2000
Capacity, forks	Q load by 600mm Loadcenter	kg	1500
Capacity, basis lift		kg	2000
Lifting height, basis lift	Up to 2500mm lift	mm	200
Power type	Electric (battery)		Battery
Type of steering	Electric power steering		
Fork wheels	Numbers / type P = Polyurethane		(4x) P
Driving wheels	Numbers / type V = Vulkollan		(2x) V
Turning radius	Wa (without platform)	mm	1674
Turning radius	Wa (with platform)	mm	2115
Aisle width	AST with pallet 800 x 1200 (without platform)	mm	2366
Aisle width	AST with pallet 800 x 1200 (with platform)	mm	2807
Speed	Driving speed without/with load	km/h	6/5,4-(11,5/8,5**)
Grade ability	Without/with load	%	10/10
Weight	Without battery	kg	1150
Brakes	Type		Electric
Battery	Acid, stainless steel box, 265 kg	V/Ah	24/344
	GEL, stainless steel box, 250 kg	V/Ah	24/284
	Lithium-Ion, stainless steel box, 265 kg	V/Ah	24/200
Electric motors	Drive motor power/S2 min.	KW/min.	2x1,5/60
	Pump motor power/S3	KW/%.	3/-
Speed control			Step less
Lifting / lowering control	Electric		Step less

** With side-guards

Masttype	h = Building height (mm)	h1 = lift (mm)	h2 = Building height by max lift (mm)	Free lift (mm)	Capacity by 600mm L/C(kg)
Simplex	2370	2000	2395	1975	1500
Duplex	2210	3500	3895	186	1000
	1960	3000	3395	186	1250
	1710	2500	2895	186	1500
	1460	2000	2395	186	1500

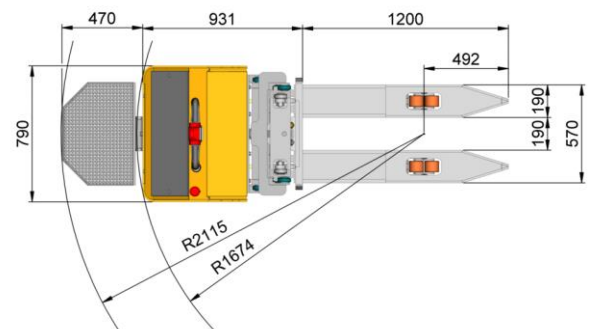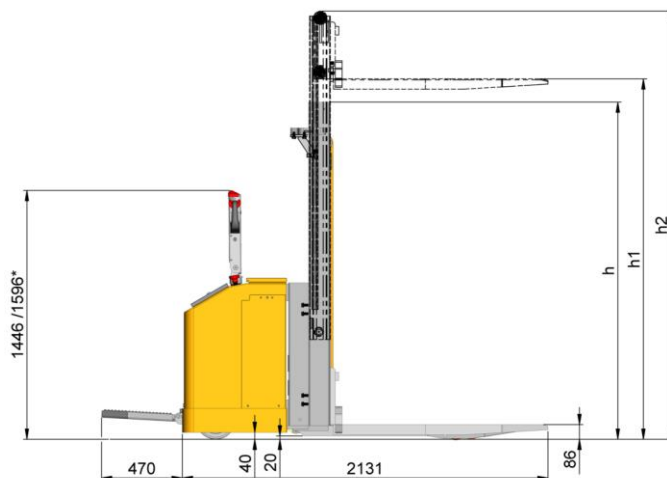

*Without platform

These specifications are subject to change without notice